



Robotic Joint Replacement Surgery


Russell H. Taylor, Peter Kazanzides


Center for Computer-Integrated Surgical Systems and Technology The Johns Hopkins University 3400 N. Charles Street; Baltimore, Md. 21218 rht@jhu.edu


Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology



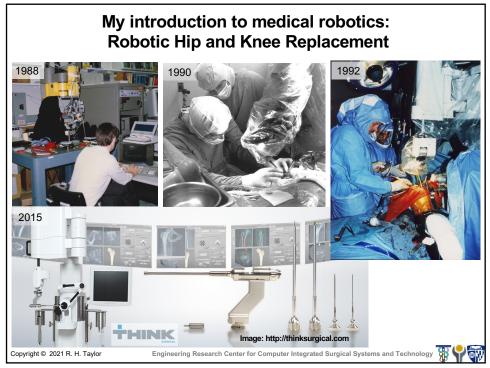

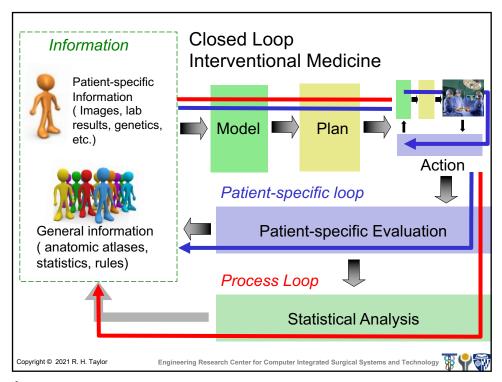

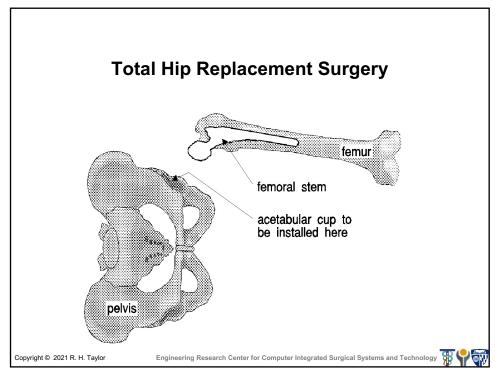

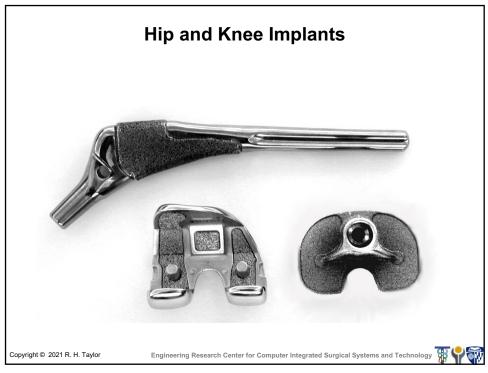

ROBODOC® (Integrated Surgical Systems)

- History
 - Veterinary use (IBM prototype, '90)
 - Clinical use (US '92 Europe, '94)
 - Marketed in Europe, Asia
 - 30 systems in Europe & Japan (9/'00)
- Total Hip Replacement (THR)
 - First clinical case 1992
 - ~ 8000 primary, ~300 revisions (9/'00)
- No fractures or other complications due to robot (9/'00)
- Total Knee Replacement (TKR)
 - First clinical case March 2000
 - ~ 30 cases as of September 2000
- No fractures or other complications




Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology

Integrated Surgical Systems Company History

- Founded 1990
- Robodoc system milestones
 - 1st Canine THR 1990
 - 1st Human THR 1992
 - 1st European THR 1994
 - European CEmark 1996
 - Pinless THR 1998
 - TKR 2000
- Other Company milestones
 - IPO 1997
 - Neuromate Acquisition 1997
 - Suspended operations 2005
 - Resumed operations 2006
 - Assets sold to Novatrix 7/2007
 - FDA Approval for hip 2008
 - Robodoc now owned by Curexo
- New name: Think Robotics
 Copyright © 2021 R. H. Taylor
 Engineering Research








13

Other Robotic THR & TKR Systems (Partial List)

- · "Conventional" serial link arms
 - Northwestern; U. Washington; U. Tokyo; Rizzoli Institute; Grenoble
- Parallel link approaches
 - Aachen; Technion; KAIST; Mazor
- Cooperative Control
 - Grenoble (PaDyc)
 - Imperial College (ACROBOT)
 - Stryker (Mako Rio)
- Freehand Navigation-Assisted
 - Smith & Nephew



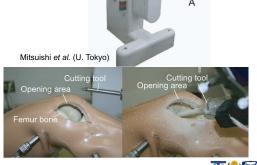

Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



Other Robotic THR & TKR Systems (Partial List)

- "Conventional" serial link arms
 - Northwestern; U. Washington; U. Tokyo; Rizzoli Institute; Grenoble
- Parallel link approaches
 - Aachen; Technion; KAIST; Mazor
- Cooperative Control
 - Grenoble (PaDyc)
 - Imperial College (ACROBOT)
 - Mako robotics
- Freehand Navigation-Assisted
 - Smith and Nephew



D. S. Kwon, J. J. Lee, Y. S. Yoon, S. Y. Ko, J. Kim, J. H. Chung, C. H. Won D. S. Kwul, J. J. Every, T. S. Toul, J. T. Ruj, J. Hinlin, S. H. Chang, C. H. Woll and J. H. Kim, "The Mechanism and the Registration Method of a Surgical Robot for Hip Arthroplasty," presented at IEEE International Conference on Robotics and Automation,1889-2949, 2002.



Copyright © 2021 R. H. Taylor

stems and Technology

16

Other Robotic THR & TKR Systems (Partial List)

- · "Conventional" serial link arms
 - Northwestern; U. Washington; U. Tokyo; Rizzoli Institute; Grenoble
- · Parallel link approaches
 - Aachen; Technion; KAIST; Mazor
- Cooperative Control
 - Grenoble (PaDyc)
 - Imperial College (ACROBOT)
 - Stryker (Mako Rio)
- · Freehand Navigation-Assisted
 - Smith & Nephew (Blue Belt Technologies)







ACROBOT surgical robot

Mako Robotics Rio (Stryker)

Copyright © 2021 R. H. Taylor



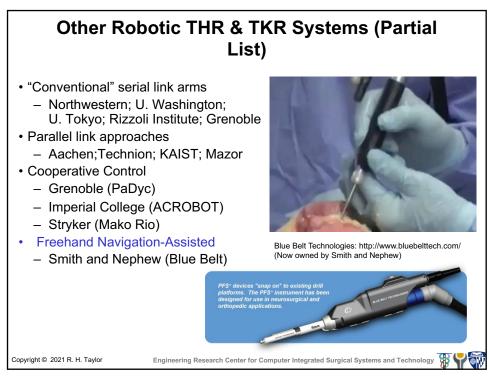

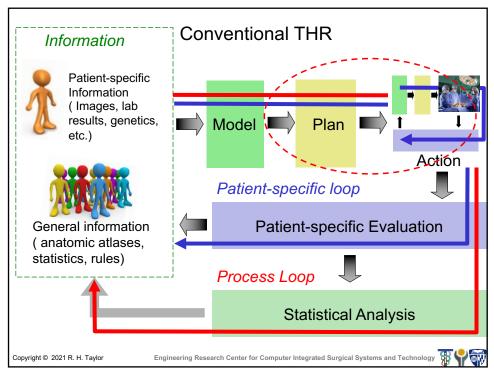

Conventional THR Planning

- Based on patient x-rays
- Surgeon selects implant design based on acetate overlays
- Difficulty in gauging magnification
- Placement determined in the OR




Integrated Surgical Systems marketing video


Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology



23

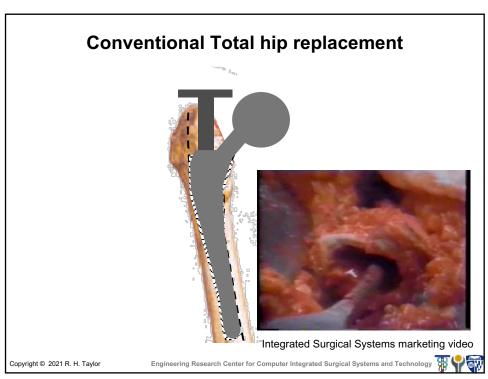


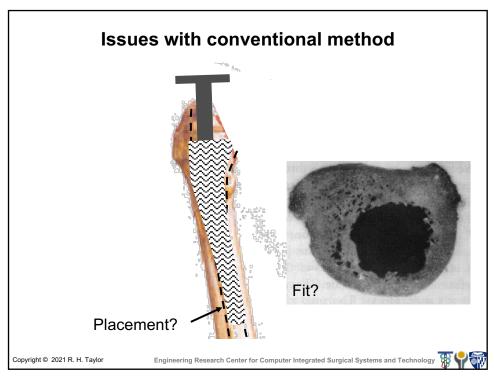

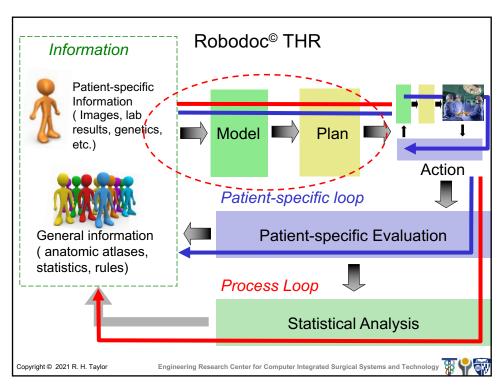

Robodoc THR Planning

- Implant pins in hip, knee (original, "pin version" only)
- · CT scan patient
- Load images into workstation
- · Resample images to produce cross-sections aligned with bone
- Select implant
- Place implant
- · Output cutter file (in CT coordinates)




Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology

28

Robodoc THR Planning


- · Implant pins in hip, knee (original, "pin version" only)
- CT scan patient
- Load images into workstation
- · Resample images to produce cross-sections aligned with bone
- Select implant
- Place implant
- Output cutter file (in CT coordinates)





Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



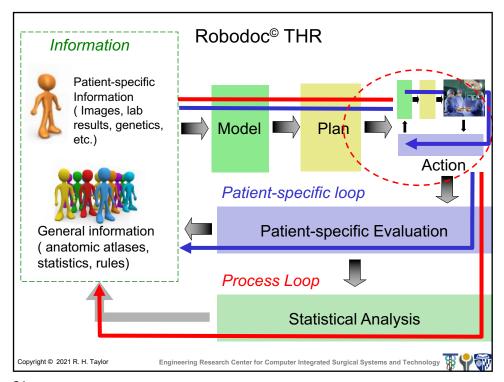

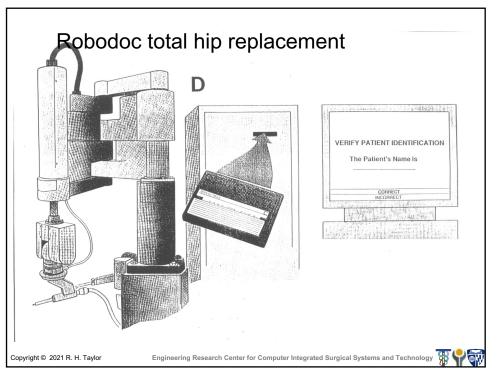

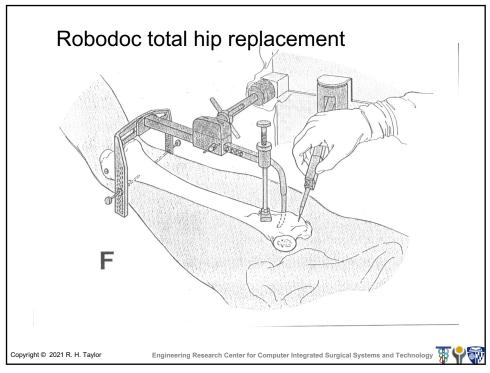

Key Step: Registration

- Establishing a transformation (conversion) from one coordinate system to another
 - CT coordinates (preoperative plan)
 - Robot coordinates (surgery)
- → Allows the robot to cut the implant in the position planned by the surgeon.

Copyright © 2021 R. H. Taylor



Pin-Based Registration


- Surgery to implant pins (bone screws) prior to CT
- Planning software detects pins in CT coordinates
- · Robot finds pins in Robot coordinates
- Software computes transformation between CT coordinates and robot coordinates
- Software uses transformation to convert planned implant position (CT coordinates) to surgical position of bone (Robot coordinates)


Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology




37

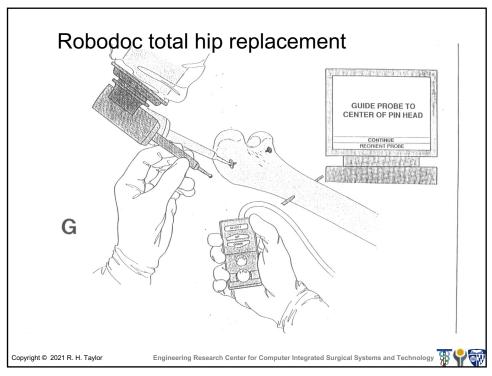

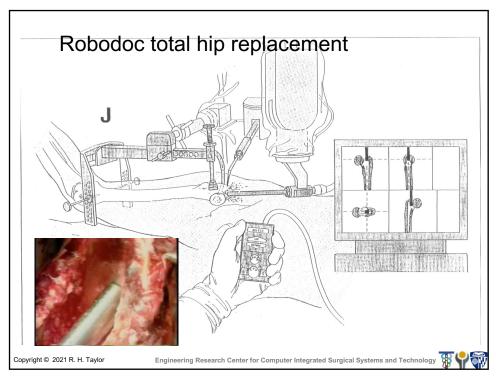

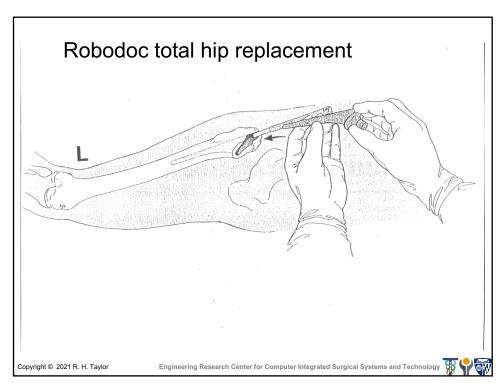

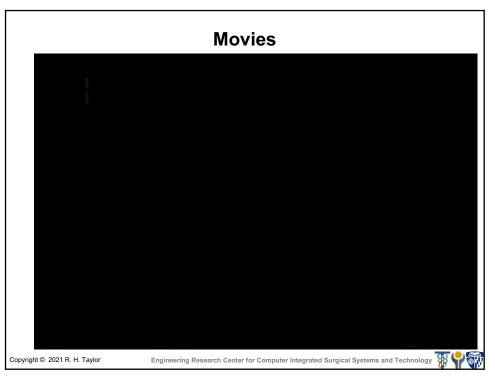

Pin-Based Registration


- + Easy to implement
- + Easy to use
- + Very accurate (if pins far enough away from each other)
- + Very reliable
- Requires extra surgery
- Causes knee pain in many patients

Copyright © 2021 R. H. Taylor



Pinless Registration

- · More complex (point-tosurface matching)
- · Surgeon creates surface model of bone from preoperative CT (semiautomatic software).
- · Surgeon uses digitizing device to collect bone surface points intraoperatively.
- · Software ensures good distribution of points
- Surgeon verifies result



Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



45

Movies





Pinless Registration Step


Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology



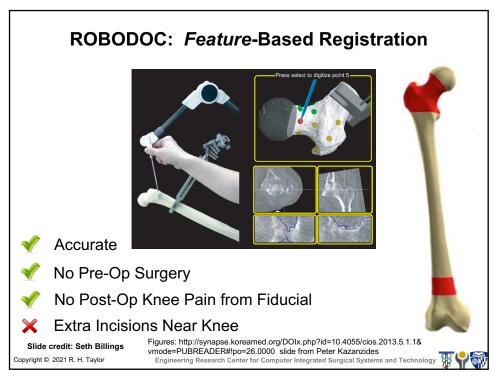

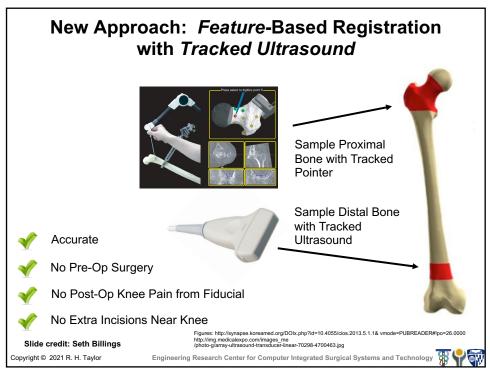

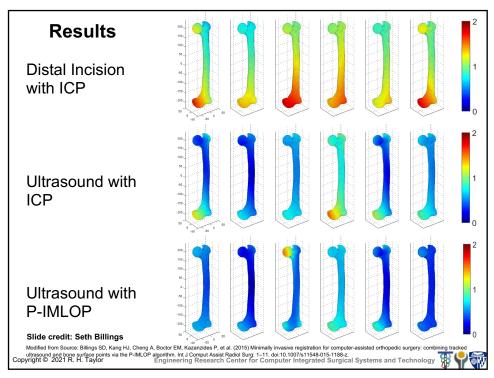

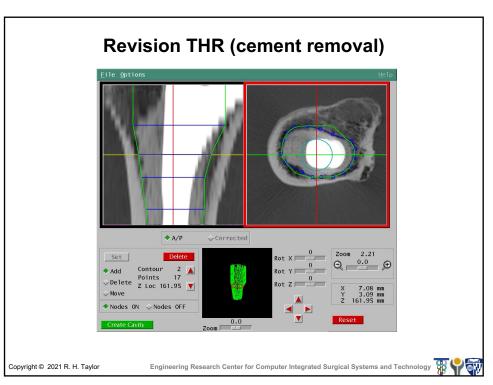

Leverage from Surgical CAD/CAM in Robotic **THR**

- Better planning
- Ability to carry out the plan
 - Accurate shape
 - Accurate placement
 - Limited forces
 - Reduced complications
 - Shape flexibility
 - Consistent execution
- **Process learning**



Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology



51

Leverage from Surgical CAD/CAM in Robotic **THR**

- **Better planning**
- Ability to carry out the plan
 - Accurate shape
 - Accurate placement
 - Limited forces
 - Reduced complications
 - Shape flexibility
 - Consistent execution
- **Process learning**

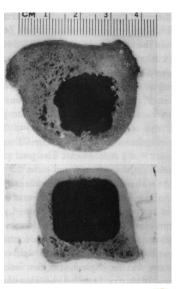

Copyright © 2021 R. H. Taylor



Leverage from Surgical CAD/CAM in Robotic **THR**

- **Better planning**
- · Ability to carry out the plan
 - Accurate shape
 - Accurate placement
 - Limited forces
 - Reduced complications
 - Shape flexibility
 - Consistent execution
- Process learning




Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology



53

Robodoc® Total Knee Replacement Photos: Think Robotics and Integrated Surgical systems Engineering Research Center for Computer Integrated Surgical Systems and Technology Copyright © 2021 R. H. Taylor

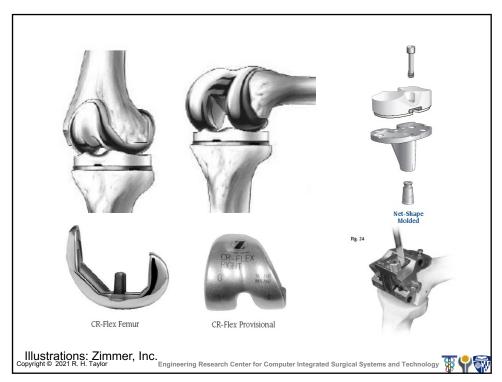

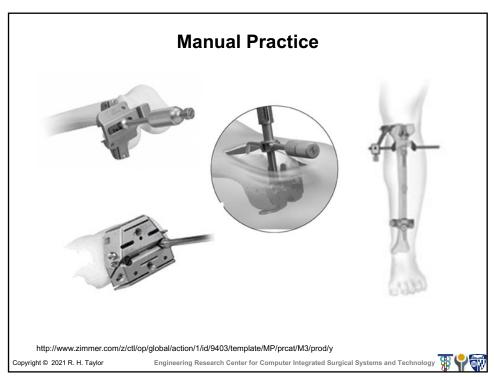

Some useful web links

Acrobot: http://www.acrobot.co.uk

http://www.makosurgical.com Mako:

Robodoc: http://www.robodoc.com

Blue Belt: http://www.bluebelttech.com

Zimmer: http://www.zimmer.com

Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



58

Fundamental Challenges


- Geometric Challenge
 - Align mechanical axes
- · Functional Challenge
 - Balance ligaments
 - Mobility
 - Stability








Thanks to Eric Stindel, MD, Ph.D. Copyright © 2021 R. H. Taylor




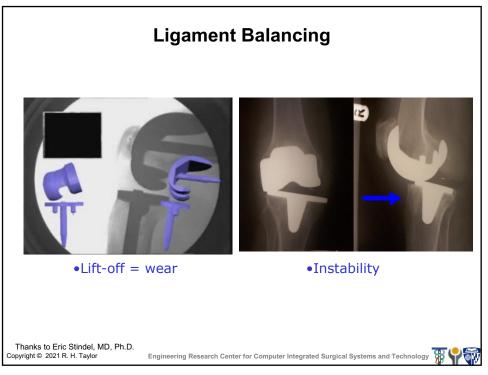


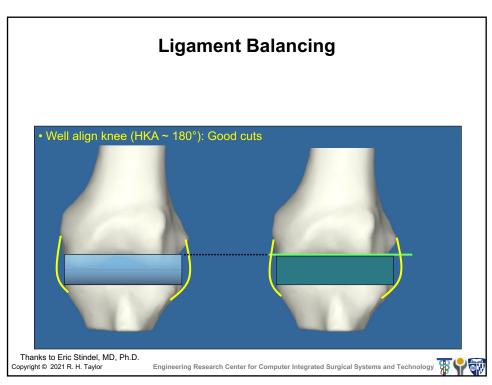


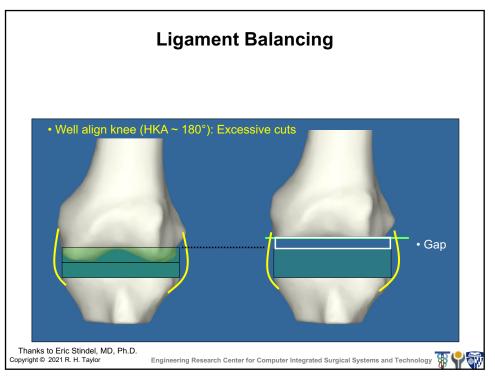


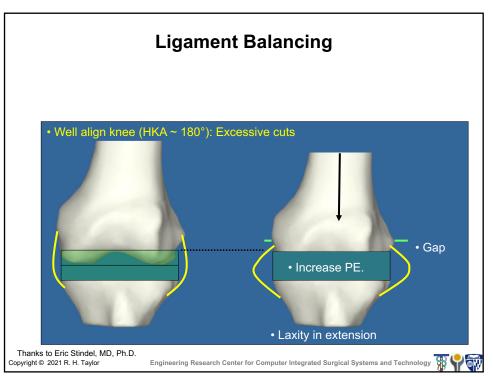


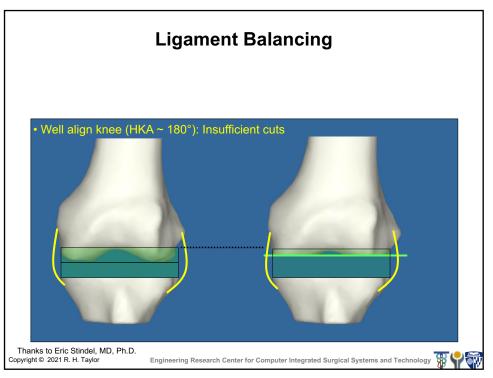

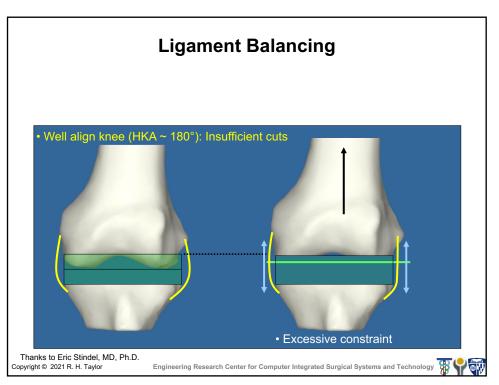


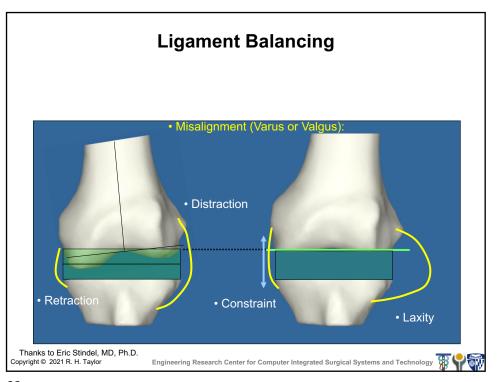


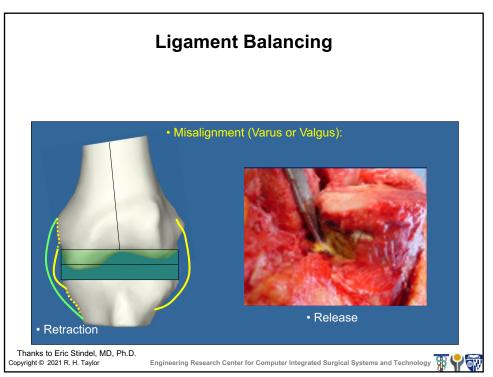


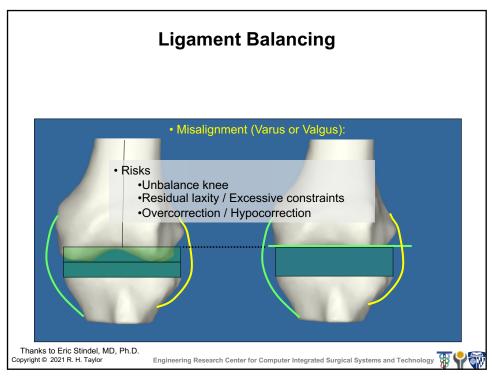




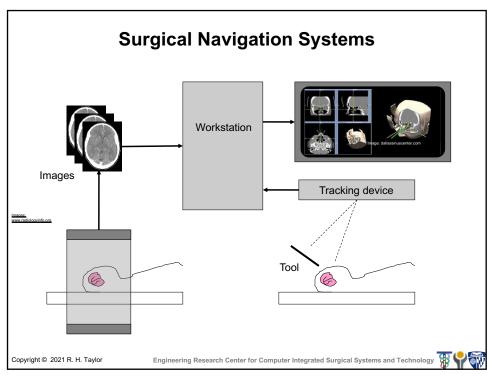

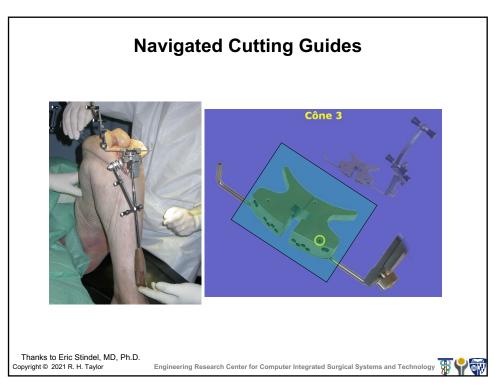

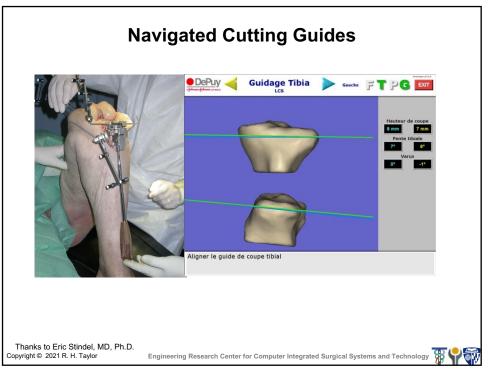

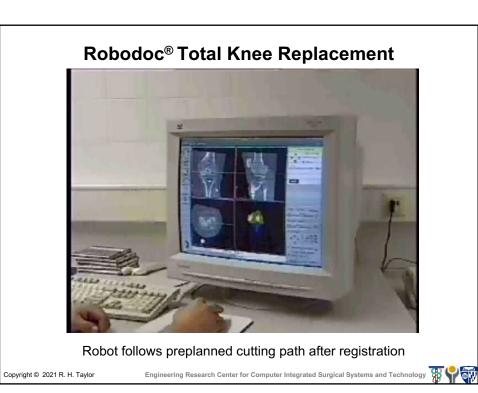






Case Study: Robodoc Early History

 Although the experiences here are quite old, this account is still very useful as a case study illustrating the extended path from early bench prototypes through commercial deployment





1990



1992



Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



78

Robodoc Early History (as seen by Peter Kazanzides)

- Ph.D. EE, Brown University (Robotics)
- Post-doc at IBM T.J. Watson Research Ctr.
- Visiting Engineer at UC Davis
- Founder and Director of Robotics and Software at **Integrated Surgical Systems**
- · Chief Systems and Robotics Engineer at JHU **ERC for CISST**




Copyright © 2021 R. H. Taylor


Engineering Research Center for Computer Integrated Surgical Systems and Technology



ROBODOC Benefits

- Intended benefits:
 - Increased dimensional accuracy
 - Increased placement accuracy
 - More consistent outcome





Broach

Robot

Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology

80

ROBODOC History


1986-1988



Feasibility study and proof of concept at U.C. Davis and IBM

1988-1990

Development of canine system May 2, 1990 First canine surgery







Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology

ROBODOC History

Human clinical prototype 1990-1995

Nov 1, 1990 Formation of ISS

Nov 7, 1992 First human surgery, Sutter General Hospital

Aug 1994 First European surgery, BGU Frankfurt





Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



82

ROBODOC History

ROBODOC in Europe and Asia 1995-2002

> C System design completed March 1996 April 1996 First 2 installations (Germany) Nov 1996 ISS initial public offering (NASDAQ)

March 1998 First pinless hip surgery

Feb 2000 First knee replacement surgery





Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



ROBODOC History

ROBODOC RIP

Oct 2003 June 2005 June 2006 Sept 2006 June 2007	Class action lawsuit in Germany ISS "ceases operations" German high court ruling against plaintiff ISS resumes operations ISS sells assets to Novatrix Biomedical
2007-present	ROBODOC reborn

2003-2007

Sept 2007 Curexo Technology formed (Novatrix) Sept 2007 Curexo files 510(K) with FDA Aug 2008 Robodoc receives FDA approval (for hip replacement surgery)

Company now operates in the US

as Think Surgical


Engineering Research Center for Computer Integrated Surgical Systems and Technology

84

Copyright © 2021 R. H. Taylor

ROBODOC Status

- Approximately 50 systems were installed worldwide
 - Europe (Germany, Austria, Switz., France, Spain)
 - Asia (Japan, Korea, India)
 - U.S. (Clinical trial for FDA approval)
- Over 20,000 hip and knee replacement surgeries
- ROBODOC no longer used in Europe
- One Korean hospital uses system regularly claim 2,500 surgeries/year
- Company purchased by Korean company; now operates as Think Robotics

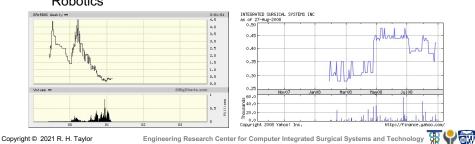

User Studies of ROBODOC THR

- In-vitro tests (cadavers and synthetic bone)
 - Compare robot and manual techniques
 - Evaluate parameters unique to robot technique
- · Controlled clinical trials
 - Small studies comparing robot and manual techniques
- Reports of clinical experience
 - Large number of patients, no control group

Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



86

In-Vitro Test Results

- Several studies showed that ROBODOC achieves more accurate placement
 - Is this clinically relevant?
- Other studies found that implant stability after robotic surgery is not always better than after manual surgery
 - Implies sub-optimal specification of implant cavity

Copyright © 2021 R. H. Taylor



Controlled Clinical Trials

- Two multi-center clinical trials in U.S. (pin-based and pinless)
- One clinical trial in Germany (pin-based)
- One clinical trial in Japan (pin-based)

Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology



88


Clinical Trial Results

- Robot procedure is longer than manual procedure
- In some cases, less postoperative pain in robot group
- + Radiographic analysis showed better position and fit for robot group
- + Fewer intraoperative fractures in robot group
- German study had a higher revision rate (due to dislocations) for robot group
 - Result of bad surgical plans

Copyright © 2021 R. H. Taylor



German Clinical Trial

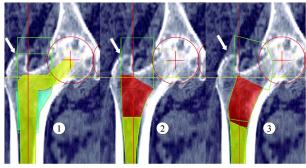

Comparison of the robotic planning sketches for different prostheses in the same patient. 1 = SROM (DePuy, Leeds, United Kingdom), 2 = 0s-teolock (Howmedica, Rutherford, New Jersey), and 3 = ABG (Howmedica). The arrow indicates the muscle insertion area. The areas framed by the thin green line indicate the structures that will be removed during the reaming process. It can be seen that reaming for the so-called anatomic ABG prosthesis will not encroach as much on the insertion of the abductor muscles on the greater torchanter.

Honl M, Dierk O, Gauck C, Carrero V, Lampe F, Dries S, et al. Comparison of Robotic-Assisted and Manual Implantation of a Primary Total Hip Replacement, A Prospective Study. J of Bone and Joint Surgery. 2003 Aug;85-A(8):1470–1478.

Copyright © 2021 R.H. Taylor Engineering Research Center for Computer Integrated Surgical Systems and Technology



90

Routine Surgical Use

- BGU Frankfurt had 3 ROBODOC systems and performed over 5000 robot surgeries
 - Average surgery time was 20 minutes longer
 - No intraoperative fractures
 - Overall good results

Copyright © 2021 R. H. Taylor



Commercial System Lessons

- Robot should either save time (money) or provide substantial clinical benefit (enable new procedures).
- · Registration should not require an additional surgery.
- · Further size reduction is necessary.
- · Robot must interface with other devices in the operating room of the future.

Copyright © 2021 R. H. Taylor

Engineering Research Center for Computer Integrated Surgical Systems and Technology

